

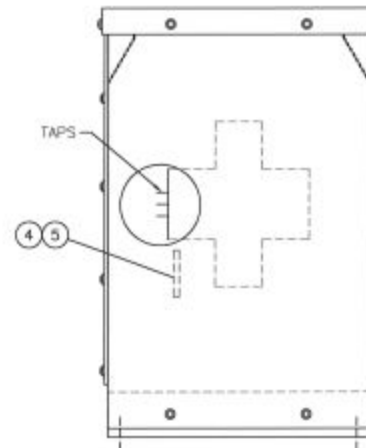


REFERENCE  
ONLY

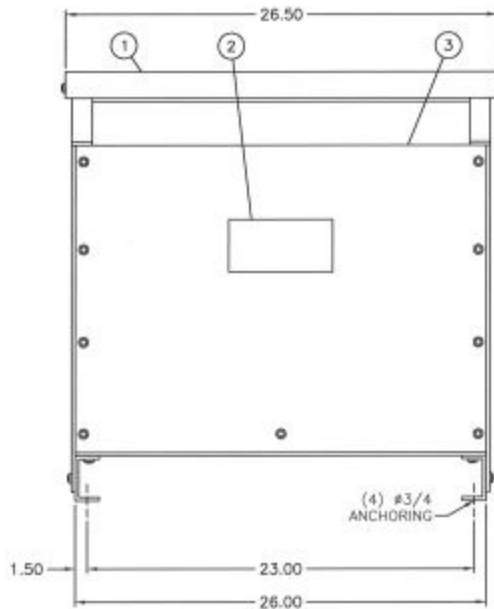

LEGEND		
ITEM	QTY	DESCRIPTIONS
1	1	TOP COVER - REMOVABLE
2	1	DIAGRAMATIC NAMEPLATE
3	2	FRONT & REAR PANEL - REMOVABLE
4	3	HV TERMINAL
5	4	LV TERMINAL

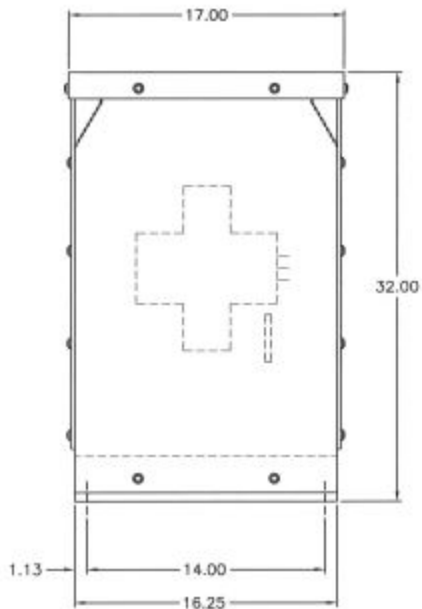

HT45A3K1-D16

S.O. NO:	<input type="checkbox"/> RECORD	<input type="checkbox"/> APPROVAL	<input type="checkbox"/> QUOTE
CUST/JOB NAME:	-		
CUST ORDER NO:	-		
SERIAL NO:	-		
ID TAG:	-		
KVA: 45 HIGH VOLTAGE: 480 DELTA LOW VOLTAGE: 240/120 CT HV TAPS: 2A4B @ 2 1/2% HV-KV BIL: 10 LV-KV BIL: 10 PHASE: 3 FREQ-HZ: 60 TEMP RISE-°C: 150 COOLING CLASS: AA INSULATION CLASS: 220°C WINDING COND: COPPER PAINT/COATING: ANSI 61 GRAY APPRX WT-LBS/KGS: 455/207			
<input type="checkbox"/> STANDARD <input checked="" type="checkbox"/> DOE 10CFR <input type="checkbox"/> K1 <input type="checkbox"/> K4 <input type="checkbox"/> K13 <input type="checkbox"/> K20			

- NOTES**
- 1) TRANSFORMERS ARE MANUFACTURED AND TESTED PER APPLICABLE ANSI, NEMA AND IEEE STDS, LATEST REVISION.
  - 2) UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES WITH ± 1/4" TOLERANCE.
  - 3) TRANSFORMER IS UL & CUL LISTED AND LABELED.
  - 4) MEETS DOE 10CFR 431, 2016 EFFICIENCY - 45 KVA TRANSFORMER MEET OR EXCEED EFFICIENCY = 98.40% @75°C@35% LOAD.
  - 5) TRANSFORMER DESIGNED FOR INDOOR (NEMA 1) AND OUTDOOR (NEMA 3R) APPLICATION.
  - 6) TRANSFORMER NOT TO BE INSTALLED IN PUBLIC ACCESS AREAS OTHERWISE IT MUST BE FENCED OR ISOLATED.

PAGE 1 OF 1	SCALE NONE	TITLE: TRANSFORMER OUTLINE DRY TYPE GENERAL PURPOSE, CASE B	<input checked="" type="checkbox"/> OUTDOOR
BY	DATE		<input checked="" type="checkbox"/> INDOOR
CADD: HM	02/20/17		
CHKD: AH	02/20/17		
APPD: <i>AH</i>	2/23/17		
REVISIONS			



CAD NO. **MG00045N3-16-45YSC** REV.